


3

選 定 漏電遮断器

7 カスケード遮断組合せ

漏電遮断器をバックアップブレーカとした場合の組合せおよびそのカスケード遮断容量値 (sym. k A) を示します。なお、判定基準は JIS C 8370 II 種によります。

カスケード遮断系統図

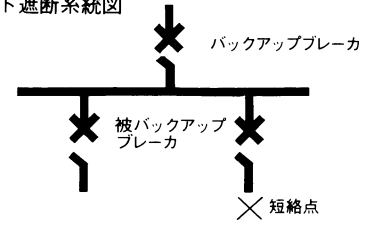

AC200V 組合せ・遮断容量

被バックアップ ブレーカ	定格遮断容量 (sym) (k A)	漏電遮断器											
		TZ100CC	TZE225E	TZ100NB	TZZ25NB	TZ-400CA	TZ-600CA	TZ-800CA	TZE100H	TZE225H	TZ-400BA	TZ-600BA	TZ-800BA
TB-5S	5 ①	25	25	50	50	35	42	42	85	85	85	85	85
TB-10S	5 ①	25	7.5	30	7.5	—	—	—	30	7.5	—	—	—
XS30NB	5	25	7.5	30	10	—	—	—	30	10	—	—	—
XE50NS, XE50NB													
XS50CB	10	25	—	42	35	25	—	—	50	35	25	—	—
XE100CB	7.5	25	—	35	25	—	—	—	50	25	—	—	—
XE225CS	15	—	25	—	25	25	—	—	25	25	—	—	—
XS50NB	25	—	—	50	50	30	—	—	85	50	30	—	—
XE100NS													
XE225NC	25	—	—	—	50	35	—	—	—	50	35	—	—
XE400NS	35	—	—	—	—	—	42	42	—	—	42	42	42
XE600NS	35	—	—	—	—	—	42	42	—	—	42	42	42
XS100NB	50	—	—	—	—	—	—	—	85	85	85	85	85
XS225NS	50	—	—	—	—	—	—	—	85	85	85	85	85
XS400CS	50	—	—	—	—	—	—	—	—	85	85	85	85
XS600CS	50	—	—	—	—	—	—	—	—	—	85	85	85
XS800CS	50	—	—	—	—	—	—	—	—	—	—	85	85
TZ30NC, TZ50CC	5	25	7.5	30	10	—	—	—	30	10	—	—	—
TZE50E													
TZ50NC	10	25	—	42	35	25	—	—	50	35	25	—	—
TZ50HC	25	—	—	50	50	30	—	—	85	50	30	—	—
TZ100CC													
TZE225E	25	—	—	—	50	35	—	—	—	50	35	—	—
TZ100NB	50	—	—	—	—	—	—	—	85	85	85	85	85
TZZ25NB	50	—	—	—	—	—	—	—	—	85	85	85	85
TZ-400CA	35	—	—	—	—	—	42	42	—	—	85	85	85
TZ-600CA	42	—	—	—	—	—	—	—	—	—	85	85	85
TZ-800CA	42	—	—	—	—	—	—	—	—	—	—	85	85

注①：1極形は除きます。

AC415V 組合せ・遮断容量

被バックアップ ブレーカ	定格遮断容量 (sym) (k A)	漏電遮断器											
		TZ100CC	TZE225E	TZ100NB	TZZ25NB	TZ-400CA	TZ-600CA	TZ-800CA	TZE100H	TZE225H	TZ-400BA	TZ-600BA	TZ-800BA
TB-5S ①	2.5	10	15	25	25	22	30	30	42	42	42	50	50
TB-10S ①	5	10	—	10	5	—	—	—	10	5	—	—	—
XS30NB	2.5	10	5	10	5	—	—	—	10	5	—	—	—
XE50NS, XE50NB													
XS50CB	7.5	10	—	15	10	—	—	—	15	10	—	—	—
XE100CB	5	10	7.5	10	7.5	—	—	—	15	7.5	—	—	—
XE225CS	7.5	—	15	—	15	15	—	—	—	15	15	—	—
XS50NB	10	—	—	22	15	—	—	—	25	15	—	—	—
XE100NS													
XE225NC	15	—	—	—	25	22	—	—	—	30	30	—	—
XE400NS	25	—	—	—	—	—	30	30	—	—	35	35	35
XE600NS	25	—	—	—	—	—	30	30	—	—	35	35	35
XS100NB	25	—	—	—	—	—	30	30	42	42	35	30	30
XS225NS	25	—	—	—	—	—	30	30	—	42	42	42	42
XS400CS	30	—	—	—	—	—	—	—	—	—	42	42	42
XS600CS	35	—	—	—	—	—	—	—	—	—	42	42	42
XS800CS	35	—	—	—	—	—	—	—	—	—	—	42	42
TZ30NC, TZ50CC	2.5	10	5	10	5	—	—	—	10	5	—	—	—
TZE50E													
TZ50NC	7.5	10	—	15	10	—	—	—	15	10	—	—	—
TZ50HC	10	—	—	22	15	—	—	—	25	15	—	—	—
TZ100CC													
TZE225E	15	—	—	—	25	22	—	—	—	30	30	—	—
TZ100NB	25	—	—	—	—	—	30	30	42	42	35	30	30
TZZ25NB	25	—	—	—	—	—	30	30	—	42	42	42	42
TZ-400CA	22	—	—	—	—	—	30	30	—	—	42	42	42
TZ-600CA	30	—	—	—	—	—	—	—	—	—	42	42	42
TZ-800CA	30	—	—	—	—	—	—	—	—	—	—	42	42

注①：1極形は除きます。